


STRAIGHT-UP FIBERGLASS BODIES

Monte Carlo, Fusion, Taurus, Charger, Intrepid & Grand Prix

Five Star's Straight-up Fiberglass bodies are designed to meet a 47" roof height, up to a 63½" tread width and fit a perimeter chassis as adopted by the SRL Wild West Shootout series and other associations and tracks.

When mounted using the dimension guidelines at right and the recommended template set, these bodies will meet the specifications as regulated by sanctioning body templates and inspection devices.

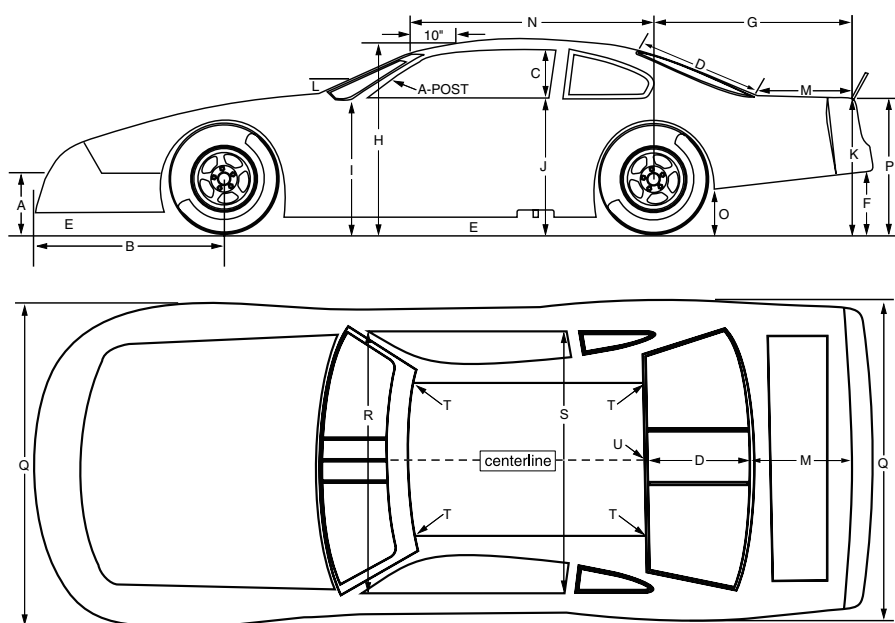


STRAIGHT-UP FIBERGLASS DIMENSION GUIDELINES

A NOSE HEIGHT (MIN): from ground to top of bumper line	17¼"
B FRONT OVERHANG (MAX): on centerline	46"
C SIDE WINDOW OPENING (MIN): at B-post	15"
D REAR WINDOW LENGTH: on centerline	31½"
E NOSE/SIDE PANEL CLEARANCE (MIN): from ground	4"
F BUMPER COVER HEIGHT (MAX): from ground	15"
G REAR OVERHANG (MAX): base of spoiler at centerline to axle centerline	47"
H ROOF HEIGHT (MIN): 10" back from windshield, on centerline	47"
I FENDER HEIGHT: at rear	32½"
J DOOR HEIGHT: at rear	33"
K QUARTER PANEL HEIGHT: at bumper cover/deck lid intersection	34½"
L WINDSHIELD ANGLE: at center/at roof windshield post	26/30°
M REAR DECK LENGTH (MAX): at center, from base of spoiler to rear window	23¼"
N FRONT OF ROOF TO CENTER of rear axle	57½"
O QUARTER PANEL HEIGHT: at back of wheel well opening	13"
P BUMPER COVER HEIGHT: at base of spoiler, on centerline	34/7/8"
Q BODY WIDTH (MAX): at wheel wells	must not extend past tires
R DOOR TO DOOR WIDTH (measured through car): at A-posts and inside edges of doors	67½"
S DOOR TO DOOR WIDTH (measured through car): at B-posts and inside edges of doors	65½"
T ROOF HEIGHT, CORNERS: at body lines	44"
U ROOF HEIGHT, REAR: at centerline	45½"

ROOF MOUNTING

A properly located roof is essential for a properly mounted body.

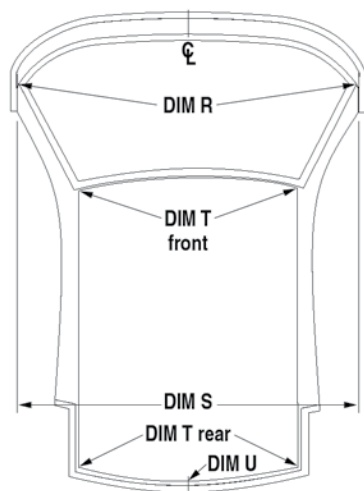

This drawing shows roof corner dimensions to help you properly locate the roof. Once the roof is located, confirm that highest point on the roof (Dim. H) is 47". This dimension is measured 10" back from the windshield.

NOTES:

1. DIM R is measured at the A-posts and inside edges of the doors.
2. DIM S is measured at the B-posts and inside edges of the doors.
3. Dimensions T front, T rear and U are taken at the edge of the roof (not on the ledge where the window sits) and are measured from the floor up.